




Yale Patio Lock PAS 24 Security Kit Fitting Instructions

SKU code: YPK1472

Compatible with Yale
PPL Lock Range

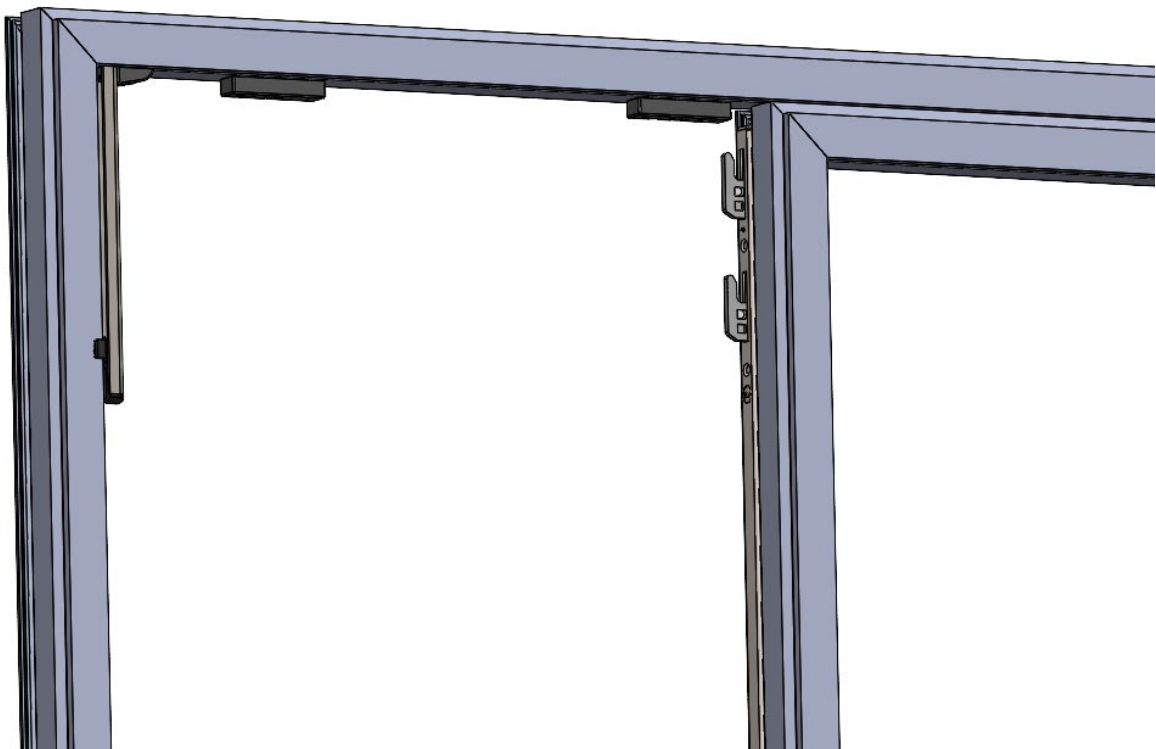


Contents Page

Step 1	3
Step 2	3
Step 3	4
Step 4	5
Step 5	5
Step 6	6
Step 7	6

Components

Check all components are present prior to installation.

YPKE01-C05




Keep Support Patio EXT

YPLE01-C02




Connector Cover Clip

YPLE01-C08



Adapter Patio EXT

YPLE01-C09

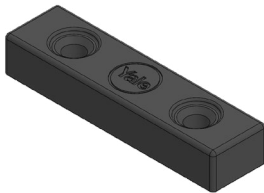

Interlock Block Patio


YPLE01



Patio Hook EXT Assy

STEP 1

Fit the YPLE01-C08 adapter as illustrated, ensuring the correct orientation is followed: use the connector shown in the left image for the top position and the connector shown in the right image for the bottom position.

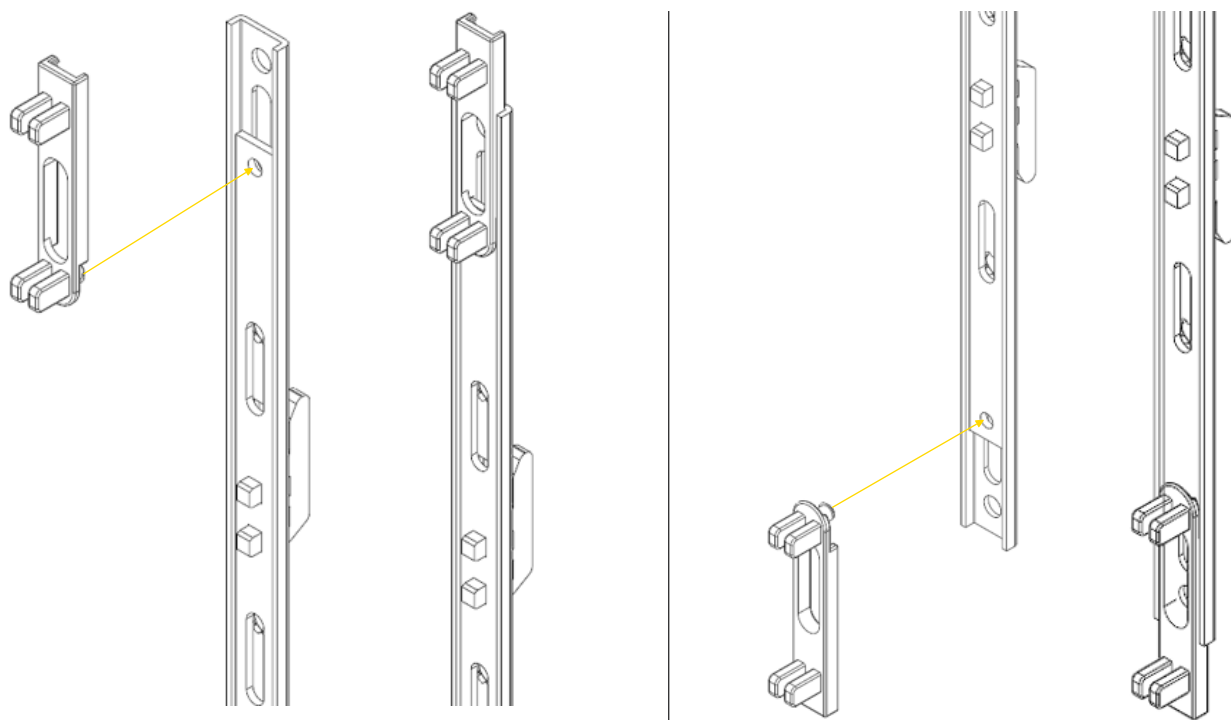


STEP 2

Fit the lock into the routed door. Refer to the image for adapter orientation: fit adapters to top and bottom of patio lock.




STEP 3

Mark and cut the shootbolt lock extensions YPLE01 to suit the door height. Offer the extensions up to the lock, mark the required length, and cut to size.

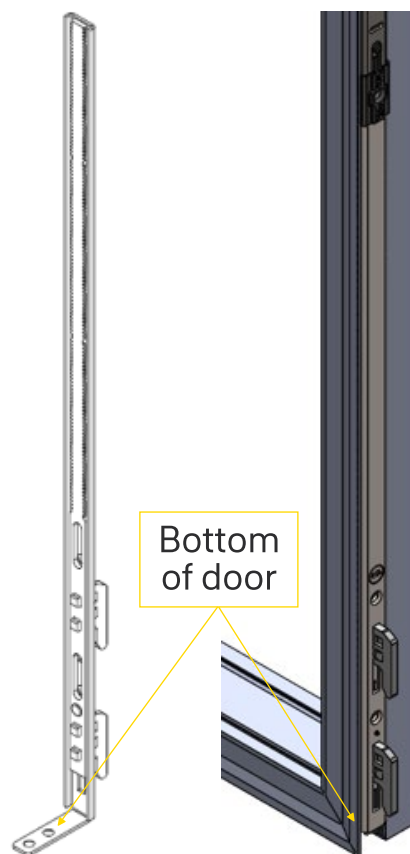


STEP 4

Fit the cut-to-length shootbolt extensions to the connectors, ensuring the serrations are correctly aligned. Once secured, fit the supplied plastic cover clips over the joints.

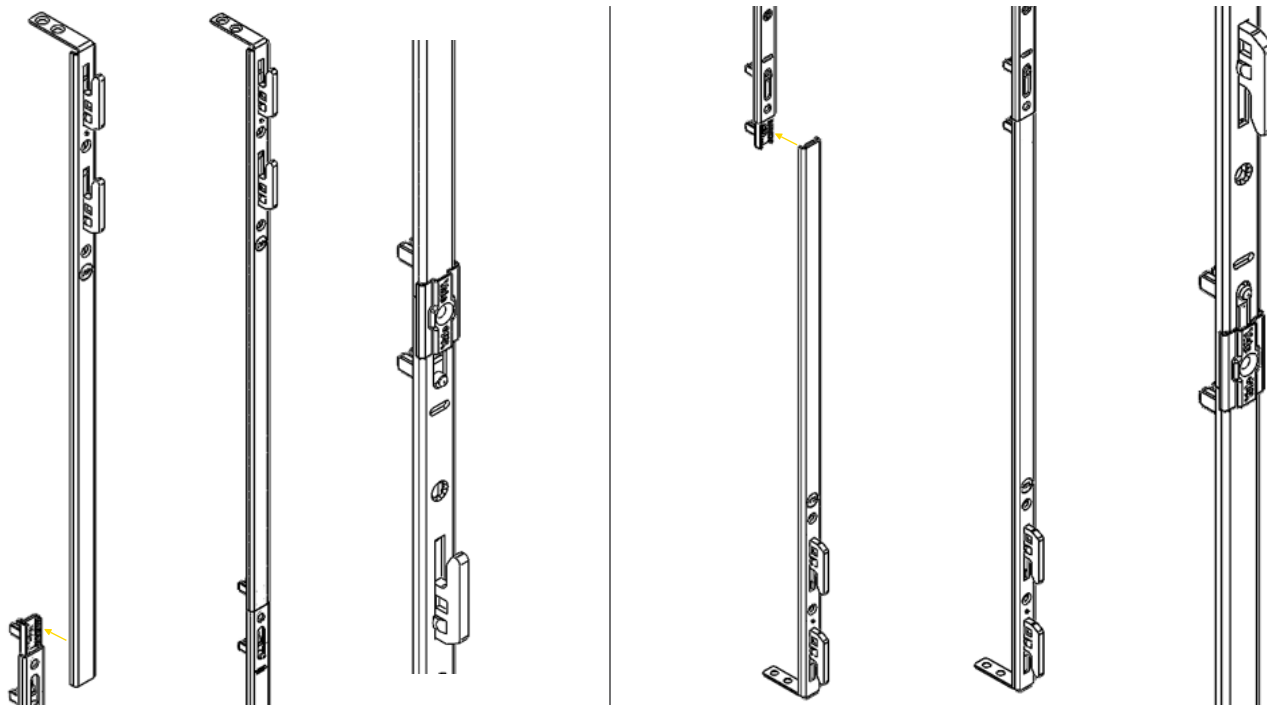


STEP 5

When fitting the keep, using the lock datum line as a reference, align the datum line on the centre keep so that both datum lines are level. Once correctly aligned, secure the centre keep in position.

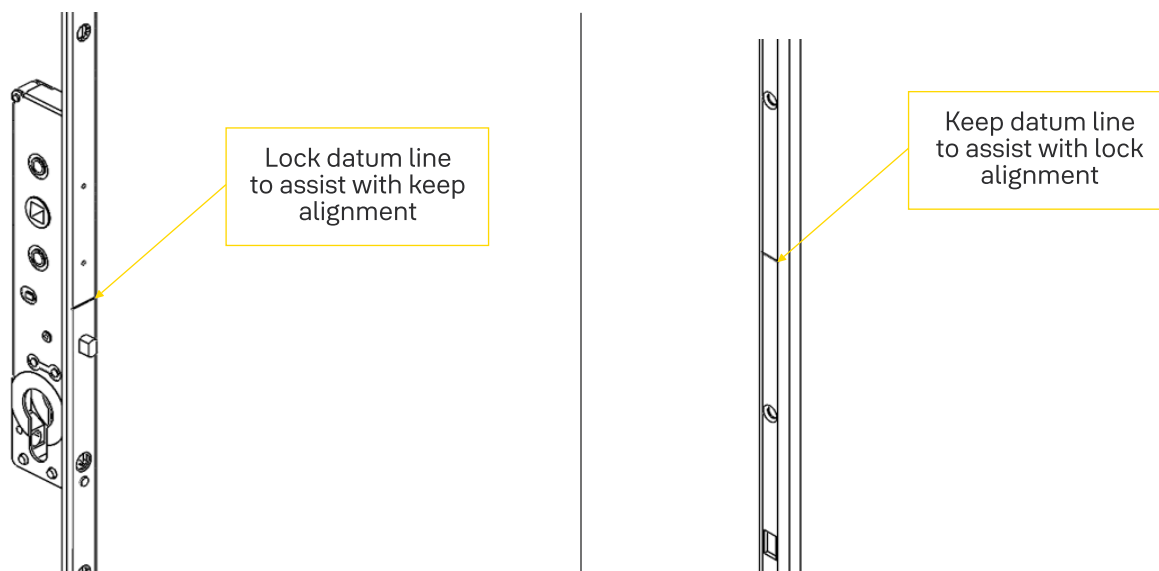


STEP 6

Insert the support feet into the top and bottom keeps as shown above. Position the assembled keeps in the frame and secure them using fixing screws. Ensure the keep and support foot shown on the left are fitted to the top position, and the keep and support foot shown on the right are fitted to the bottom position. The lock keep and keep extensions are profile related please refer to technical.

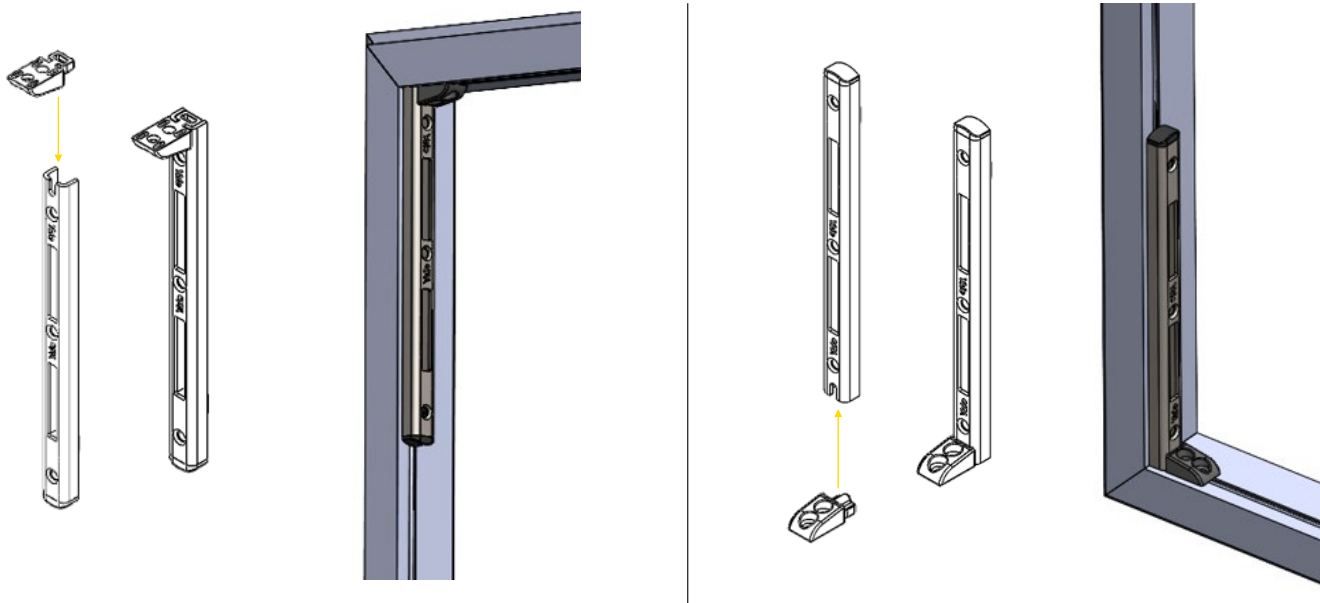

STEP 7 - Recommended

Secure the interlock blocks to the frame using screws. Position the blocks to engage with the door when closed, providing additional support and helping to prevent the door from moving away from the frame.

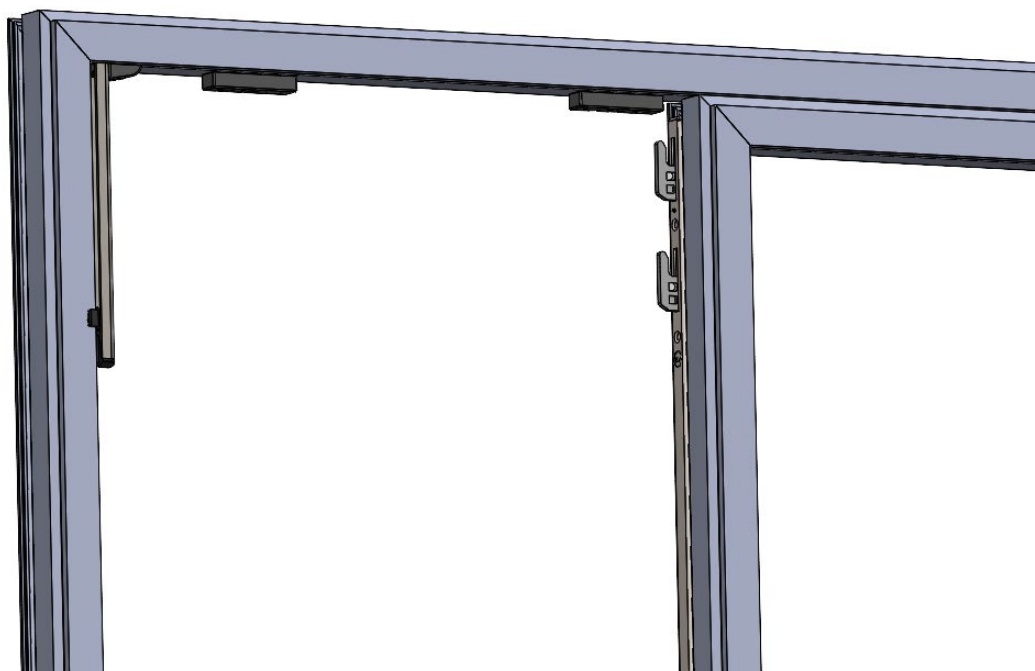

NOTES



Part of ASSA ABLOY

Yale, School Street, Willenhall,
West Midlands WV13 3PW, UK

Issue No. August 2026

www.yaledws.co.uk