
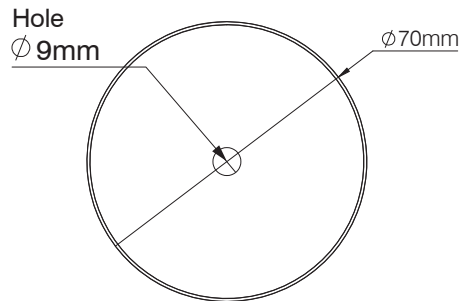


Fitting Instructions

Supa Door Knob

Through fix

1. Decide the best location for your door knob on your door.
2. With a pencil; mark the hole point, as per the measurements. Double check the location is correct and carefully a drill pilot hole using a 2mm drill bit.
3. Using a 9mm drill bit, drill the hole for the fixing screw. Drill as straight as you can, keeping the drill at a right angle (90° to the door).
4. Position the door knob over the fixing hole and the bolts to the back of the knocker and guide the bolts through your door.
5. Mark the bolt and remove to cut the excess off. Double check the depth of the door allowing for the bolt to go through **AND** the nuts to screw onto after cutting. Reposition the door knob and tighten up the nut.



Testing

Check that the door knob is flat against the door and the fixing bolt is fastened securely. At this point there should be no movement between the door knob and door. Test by opening and closely the door several times using just the door knob.

Maintenance

To ensure that your SUPA stainless steel product maintains its high quality finish please;

DO wipe regularly with a soft, damp cloth to remove any finger prints. We recommend that you only use warm soapy water with a lint free cloth. Wipe dry with a soft clean cloth.

DON'T use abrasive cleaners or scouring pads, bleach or solvents.

ALWAYS USE APPROPRIATE PPE WHEN USING TOOLS