


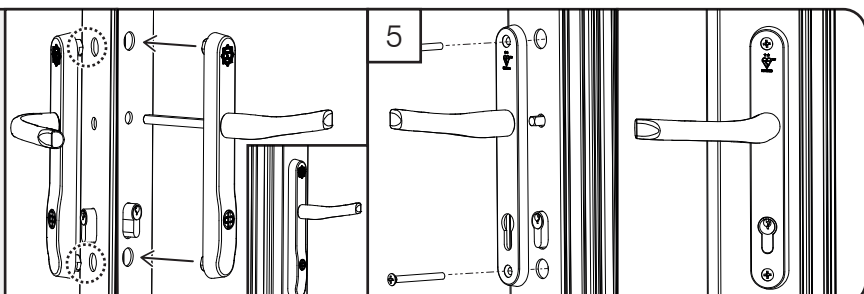


# Supa™ Secure Door Handle - Fitting Instructions

To ensure this handle fits your door please check that the 3 measurements below, match your requirements:

<p><b>1</b></p>  <p>The distance between the centre of the locking lever to the centre of the keyhole known as the PZ distance - the PZ distance of this handle is 92mm.</p>	<p><b>2</b></p>  <p>The distance between the centre of the top screw and the centre of the bottom screw - this distance on this handle is 211mm.</p>	<p><b>3</b></p>  <p>The length of the handle backplate, top to bottom - this handle backplate is 240mm long.</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p><b>4</b></p> <p>If upgrading from a standard handle, the holes for the bosses will need to be enlarged 17mm to allow fitting.</p>	<p><b>5</b></p>  <p>Insert correct length of spindle (supplied) into the external lever. Slide the spindle through the lock mechanism from the external side of the door. The backplate should fit up against the sash covering the cylinder lock. On the internal side of the door slide the backplate onto the spindle &amp; up to the sash. Select the correct length screws (supplied) &amp; insert through fixing holes &amp; screw together taking care not to over tighten.</p>
--------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

This handle complies with: BSEN1906: 2012 - Pass code: 4|7|-|0|1|5|0|A & also achieves TS007: 2014 2 star rating

This security hardware offers additional defence to several types of attack. However, to ensure enhanced resistance to all commonly used attack methods, this product **MUST** be used in conjunction with a one star or three star cylinder meeting TS 007 to ensure security.

The star marking will be marked on the cylinder itself. However, in the case of an already-installed cylinder, checking this may require removal of the cylinder from the door. Cylinders supplied before the availability of this specification may be marked with the BSI "Kitemark" logo without any indication of star rating. These should be accepted as equivalent to a one star cylinder under this specification.

In a cylinder lock, it is the cylinder which actually recognises the correct key and provides protection from picking and other forms of manipulation; cylinders which have been successfully tested against these forms of attack under this specification will carry 1-star. A three star cylinder offers the same protection as a one star cylinder plus protection from force attack."

## Supa™ Stainless Steel Cleaning Instructions

Stainless Steel performs best when clean. As such we recommend that your Supa™ stainless steel product is regularly cleaned to maintain its appearance and preserve its corrosion resistance.

We recommend cleaning your product once a month and more often in areas subject to heavy soiling or frequent use.

All exposed stainless steel surfaces should be wiped over with a clean cloth and a solution of warm water and a mild detergent, immediately followed by rinsing in clean water and the surface dried thoroughly with a soft cloth.

Carbon steel brushes and steel wool should be avoided as they may damage or compromise the surface, which could lead to rusting.